




Welch Allyn Ear Wash System

Improve efficiency and patient safety with this advanced ear wash system.

Welch Allyn°

Advancing Frontline Care™

MC9220SS_Earwash.indd 1 7/16/12 10:40 AM

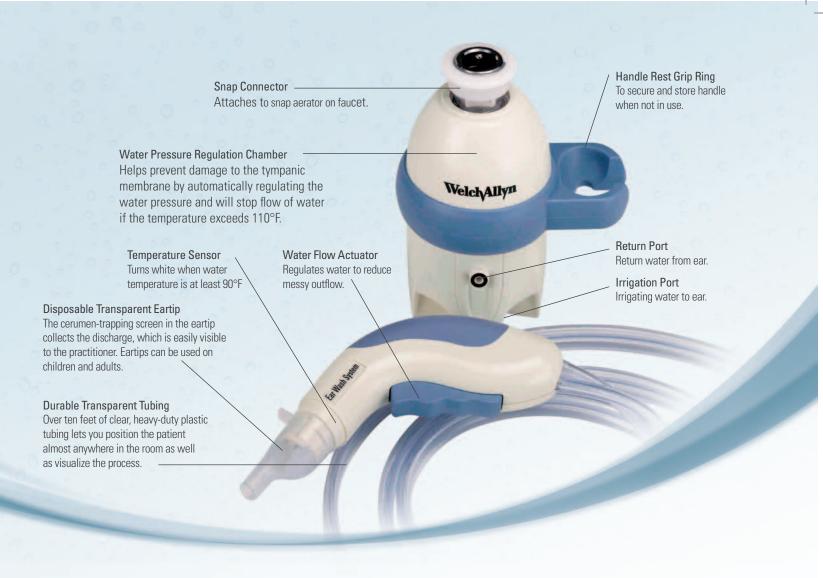

- Eliminates messy outflow by automatically dislodging, removing and disposing of cerumen
- Reduces potential for common side effects such as vertigo, nausea, deeper cerumen impaction, perforated ear drums and other tympanic membrane damage
- Easily control and monitor suction, water temperature and pressure levels
- Compact and easy to transport from room to room

Welch Allyn Ear Wash System Specifications

| Environment | Operating Temperature: $50^{\circ}-+104^{\circ}F$ ($10^{\circ}-+40^{\circ}C$) Storage Temperature: $-40^{\circ}-+120^{\circ}F$ ($-40^{\circ}-+49^{\circ}C$) |
|-------------|--|
| Water | Flow Rate from Eartip: 125 mL (0.0264 gal) of water per 20 seconds at operating pressure. |
| | Source: (faucet) Water Pressure Range: 40–100 Psi (275 kPa–690 kPa) |
| | Minimum Source Water Flow Rate: 7.5 I/min (2 gal/min) Water Pressure from Eartip: Typical range 10–13 Psi (69 kPa–90 kPa) |

Ordering information

| 29350 | Ear Wash System |
|-------|--------------------------------------|
| 29360 | Eartips (case is 4 boxes of 25 tips) |
| 29330 | Tubing (hose assembly) |
| 29320 | Handle and hose assembly |
| 29372 | Snap aerator |
| 29373 | Aerator adaptor kit U.S. |
| 29381 | Aerator adaptor kit outside U.S. |
| | · |
| | |

For more information, please contact your local Welch Allyn representative or call customer care at 1.800.535.6663.

Welch Allyn Corporate Headquarters 4341 State Street Road, PO Box 220, Skaneateles Falls, NY 13153

WelchAllyn^o

Advancing Frontline Care™

© 2012 Welch Allyn SM2378 Rev C | www.welchallyn.com

MC9220SS_Earwash.indd 2 7/16/12 10:40 AM